

WHEEL WEIGHTS PLATFORMS

PMR · PMS · PMT
WIRELESS
PORTABLE SOLUTION
FOR CONTROL STATIONS



WIM SPEED: UP TO 15 KM/H
(CERTIFICATION UP TO 5 KM/H)



**SOLUTIONS
FOR INDUSTRIAL WEIGHING
DESIGN**

QUALITY AND MAXIMUM RELIABILITY

www.giropes.com | giropes@giropes.com | [Linkedin:giropes-sl](https://www.linkedin.com/company/giropes-sl)
Pol. Empordà Internacional, C/Molló, 3 | 17469 VILAMALLA- (Girona) SPAIN
T(34) 972 527 212

PMR - PMS - PMT WIRELESS



MAIN-FEATURES

Structure	Aluminium
Protection	IP68
Installation	On ground portable
Operating temperature	-10C° a +40C°
Height	58 mm
Finishes	The platform is anodised silver and the feet are black.
Models	for CE-M legal use for internal use



IMPORTANT

Non-slip rubber on the bottom of the foot for a better grip with the surface.

Available in a version for Legal Metrology.

Silver anodised finish on the platform and black finish on the feet.

The platforms must be placed on a rough surface or fixed to the floor with their respective accessories.

NOTE: always check that all the wheels are at the same height (the angle resulting from possible unevenness must be less than 0.5°).

FEATURES in legal metrology version

The weight per individual platform can be used in commercial transactions.

The total weight of the vehicle can be used for commercial transactions according to the customer's application.

Wheel weighing system, where the platforms number is equal to the number of wheels of each vehicle, it's homologated, because the weight of the vehicle are determinated with only one wheighing.

The CE-M division with which the total vehicle weight is indicated on the wheel weighing systems (4 platforms) is equal to the divisions of the individual platforms.

The axle weighing system it's homologated only in static mode.


The axle weighing system i'ts UE homologated 2014/31/31/UE (NAWI, static weighing) for axle weighing verification.

For axle truck weighing (sum of the axles weigh), consult concret or vigen normative of yours country.

Two operating options (Wireless or Cable).

*For homologated aplications or wim systems uses, it will be neccessary leveling modules use or bury the platforms.

PORTABLE SUITCASE INDICATOR **GI620 WIRELESS**

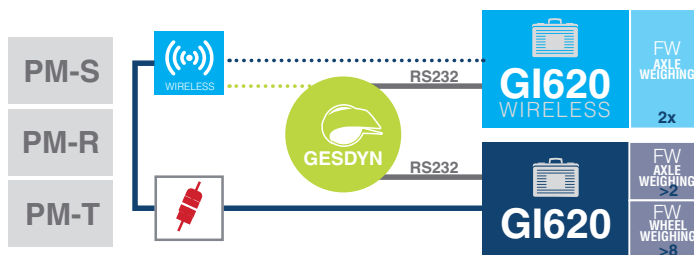

FOR PORTABLE WEIGHING PLATFORMS

*COMPATIBILITY: SOFTWARE FOR PC AND INDICATORS GI620 ACCORDING TO DESIRED USE CONNECTION

PMR

500 mm x 400 mm

Height and Weight per platform: 58 mm 18 kg

INTERNAL USE REFERENCES

Reference	Weight (kg)	Capacities (kg)	Fraction (kg)	CE-M fraction (kg)	Stainless steel cell		Nickel cell	
					#Code	€	#Code	€
PMR1.5	18	1500	0,2	-	190233	-	190243	-
PMR3	18	3000	0,5	-	190239	-	190249	-
PMR6	18	6000	1	-	190241	-	190251	-
PMR10	18	10000	2	-	190235	-	190245	-
PMR15	18	15000	2	-	190237	-	190247	-

LEGAL CE-M USE REFERENCES **M**

Reference	Weight (kg)	Capacities (kg)	Fraction (kg)	CE-M fraction (kg)	#Code	€	#Code	€
M PMR1.5M	18	1500	-	0,5	190234	-	190244	-
M PMR3M	18	3000	-	1	190240	-	190250	-
M PMR6M	18	6000	-	2	190242	-	190252	-
M PMR10M	18	10000	-	5	190236	-	190246	-
M PMR15M	18	15000	-	5	190238	-	190248	-



PMS

700 mm x 450 mm


Height and Weight per platform: 58 mm 26 kg

INTERNAL USE REFERENCES

Reference	Weight (kg)	Capacities (kg)	Fraction (kg)	CE-M fraction (kg)	Stainless steel cell		Nickel cell	
					#Code	€	#Code	€
PMS6	26	6000	1	-	190257	-	190263	-
PMS10	26	10000	2	-	190253	-	190259	-
PMS15	26	15000	2	-	190255	-	190261	-

LEGAL CE-M USE REFERENCES **M**

Reference	Weight (kg)	Capacities (kg)	Fraction (kg)	CE-M fraction (kg)	#Code	€	#Code	€
M PMS6M	26	6000	-	2	190258	-	190264	-
M PMS10M	26	10000	-	5	190254	-	190260	-
M PMS15M	26	15000	-	5	190256	-	190262	-

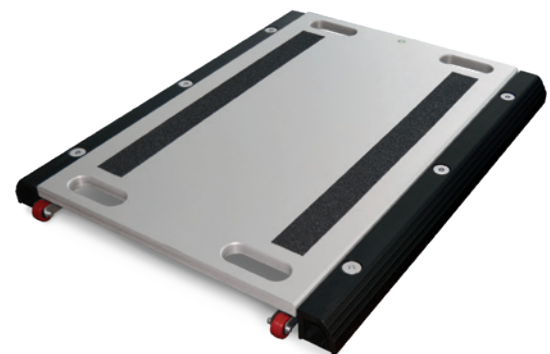

PMT

900 mm x 500 mm

Height and Weight per platform: 58 mm 41 kg

INTERNAL USE REFERENCES

Reference	Weight (kg)	Capacities (kg)	Fraction (kg)	CE-M fraction (kg)	Stainless steel cell		Nickel cell	
					#Code	€	#Code	€
PMT6	41	6000	1	-	190271	-	190280	-
PMT10	41	10000	2	-	190265	-	190273	-
PMT15	41	15000	2	-	190267	-	190275	-
PMT20	41	20000	2	-	190269	-	190277	-

LEGAL CE-M USE REFERENCES **M**

Reference	Weight (kg)	Capacities (kg)	Fraction (kg)	CE-M fraction (kg)	#Code	€	#Code	€
M PMT6M	41	6000	-	2	190272	-	190279	-
M PMT10M	41	10000	-	5	190266	-	190274	-
M PMT15M	41	15000	-	5	190268	-	190276	-
M PMT20M	41	20000	-	10	190270	-	190278	-



ACCESSORIES

PORTABLE SUITCASE INDICATOR GI620 WIRELESS



REFERENCES

Description	# Código	€
GI620 indicator (wired version)	210268	-
GI620 indicator with USB (wired version)	210268-08	-
GI620 indicator (wireless version)	210268-05	-
GI620 indicator with USB (wireless version)	210268-09	-
Firmware Wheel weight*	330006	-
Firmware Axles weighing	330007	-

* Available for GI620 wire version

FRAME FOR EMBEDDING PMR-PMS-PMT



REFERENCES

Reference	Description	# Código	€
PMR300	Juego de 2 marcos para empotrar plataformas PMR (500x400mm)	190002	-
PMS300	Juego de 2 marcos para empotrar plataformas PMS (700x450mm)	190003	-
PMT300	Juego de 2 marcos para empotrar plataformas PMT (900x500mm)	190004	-

COVERS FOR PROTECTING THE PLATFORM PMR-PMS-PMT



REFERENCES

Reference	Description	# Código	€
PMR301	Juego de 2 tapas para proteger plataformas PMR (500x400mm)	190048	-
PMS301	Juego de 2 tapas para proteger plataformas PMS (700x450mm)	190056	-
PMT301	Juego de 2 tapas para proteger plataformas PMT (900x500mm)	190066	-

ALUMINIUM MATS



REFERENCES

Reference	Description	# Código	€
EST700	Modular aluminum mat kit with 1m rubber ramp for a PMS (700mm)	190317	-
EST900	Modular aluminum mat kit with 1m rubber ramp for one PMT or PMU (900mm)	190318	-
CEST700	Modular aluminum mat kit with 3m rubber ramp for a PMS (700mm)	190211	-
CEST900	Modular aluminum mat kit with 3m rubber ramp for one PMT or PMU (900mm)	190212	-

Set of 2 modular aluminum mats of 1 or 3 meters with rubber ramp for greater grip and accessibility of the wheels of different types of vehicles. Compatible with the different PM platforms, easy to transport and homologated.

* VAT and cost of transport are not included.