

**GIROPES**




# Serie CWS40-20

**WEIGHING  
CONTAINERS**

WIDTH  
**2,70 m**



## CWS20

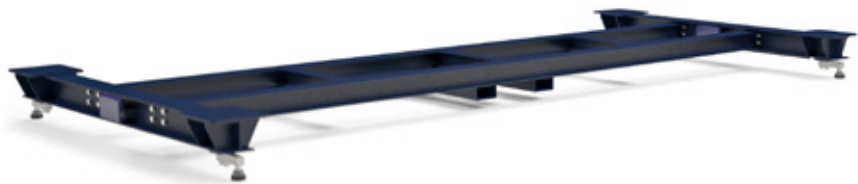

## CWS40



## INSTALLATION



Fixed installation or on a base of asphalt



System fixed

## TRANSPORTABLE

The model CWS20 and CWS40 can also be used in a transportable way, with a forklift or with slings. It can carry to a new weighing station.



Serie  
 GI400 | GI410 | GI430  
 INDICATORS AND REPEATERS  
**See the page 62**

GI430  
 FIRMWARE weigh-trucks

Serie  
**CWS40-20**

**WEIGHING  
 CONTAINERS**

WIDTH  
**2,70 m**

## SPECIFICATIONS

### FEATURES

- Finished** Two component polyurethane paint in blue colour RAL5004.
- Screwing** Screwing of quality 8.8 in zinc (except screws inferior M14)

### LOAD CELLS

- Model** Stainless steel IP68. 3000 d OIML R60
- Cells** G3S de 10 t. Shear beam load cell,  
 G3i de 10 t. Shear beam load cell, fully in stainless steel.

### ELECTRONIC

ABS connection box with 4 or 8 load cells with potentiometers. IP65 protection.  
 15 m of cable connection from the scale to the indicator.  
 It is advisable the installation of an earthed landing following instructions M.I.BT039 (not included).

## OPTIONAL

### FINISHED

**GALVANISED**  
 The galvanised finition resists corrosion, ensuring maintenance and longevity.

### REFERENCE

Reference	Capacity (t)	Dimensions (m)	N. of cells	Height (mm)	Code #
CWS20	32	6x2,7	4	377	150333
CWS40	35	12x2,7	6	377	150334
Installation and cabling	-	-	-	-	

Note 1: the prices do not include the indicator

### ACCESSORIES

Description	Code #
Fraction, additional meter of cable.	240085
Anchor plate 500 x 500 x 15 mm for scales. (units)	160206

OTHER AVAILABLE ACCESSORIES LOOK AT PAGE 56