

CWS-DUO

CONTAINER SCALES ROBUST AND PORTABLE

TWO HIGH-STRENGTH WEIGHING BARS,
WITH INTEGRATED REMOVABLE DIGITAL INDICATOR.



giropes



CWS^{DUO}
CONTAINERS



WIDTH
3,1 m

CAPACITY
40 t

Portable container scales, composed of two high-strength weighing bars, each equipped with its own removable digital indicator.

Ideal for weighing 20- and 40-foot containers.



Connectivity
wireless



Battery
rechargeable



Integrated
indicator

ADVANTAGES

- » Easy to transport thanks to its U-shaped supports.
- » Capacity of 20 t per bar (40 t per set).
- » Operating autonomy of up to 90 hours.
- » Removable indicator for easy recharging.

APPLICATIONS

- » Weighing of maritime containers.
- » Logistics and shipping.
- » Warehouses and industry.
- » Verification of loads.



INTEGRATED INDICATOR

Maximum protection against dust and water in demanding environments.



ADJUSTABLE FEET

Quick and stable leveling on most surfaces.



TRANSPORT U

To facilitate movement with a forklift.



SOFTWARE

The GIIPP software allows simultaneous management of multiple scales or platforms, automatically adding the total weight and displaying in real time the gross weight, the tare, and the net weight. Each weighing is recorded in a customizable database, with options for query, filtering, and export in CSV. Multi-platform and multi-language application.

SPECIFICATIONS

BAR FEATURES

Material	Painted steel
Weight	340 kg / weighing bar
Capacity	20 t / weighing bar
Dimensions	3100 x 380,6 x 240 mm
Junction box protection rating	IP65

INDICATOR

Material	Anodized aluminum (stainless steel screws)
Dimensions	432 x 117 x 110 mm
Weight	4,7 kg
Display type	6-digit 27 mm LCD
Degree of protection	IP68
Operating temperature	From -10 °C to +40 °C
Storage temperature	From -20 °C to +70 °C
Rechargeable lithium battery	7.4 V 3500 mA
Battery life	90 h
Charger	110-240 V AC, 50/60 Hz and 8.4 V output with charge level indicator

LOAD CELLS


Type of cell	Shear
Number of cells	4 units / Weighing bar
Excitation	5V DC
Nominal sensitivity	2 mV/V $\pm$ 1 %

COMMUNICATION

- » Bluetooth communication with Giropes tablet or PC, only through GIIPP multiplatform software (optional).
- » Bluetooth connection with a maximum range of 50 m*.
- » Omnidirectional antenna from 2400 to 2500 MHz.

* The maximum Bluetooth range is only guaranteed with the Giropes tablet.

DIMENSIONS

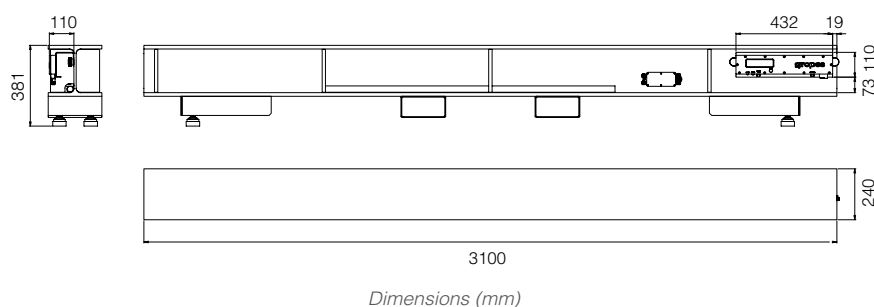

OPTIONALS

Description	Code	
TABLET 8" ANDROID 12 - 8 GB/128 GB	281239	
GIIP APPLICATION SOFTWARE	281218	
Plate kit for securing CWS-DUO	168267	

Reference CWS-DUO

Description	Code	
CONTAINER WEIGHING SYSTEM CWS DUO	151324	

